
| STATE | PROJECT NUMBER | SHEET NO. | TOTAL SHEETS |
|-------|----------------|--------------|-----------------|
| GA. | | 61 | 92 |
| L | | A | |

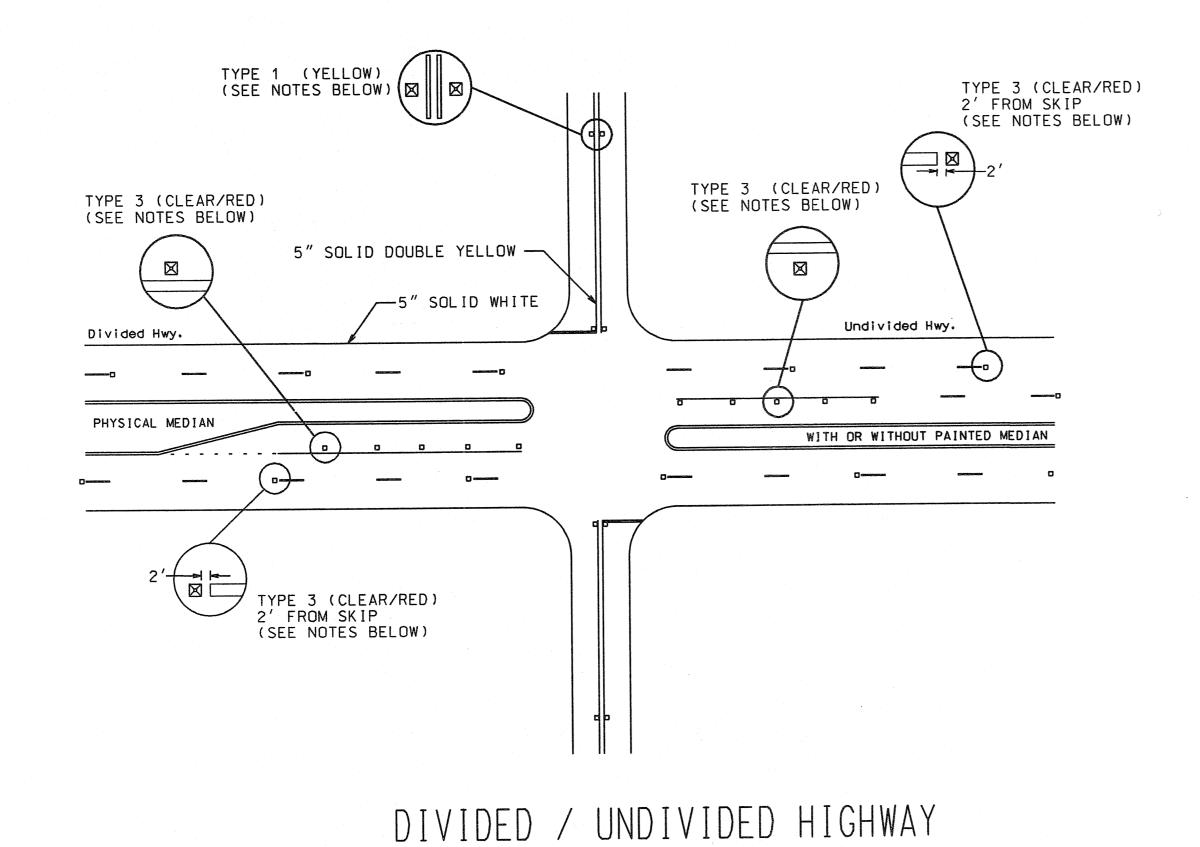


5" SKIP DOUBLE YELLOW —

REVERSIBLE LANE


TYPE 1 (YELLOW)
2' FROM SKIP
(SEE NOTES BELOW)


←TRAFFIC—

—TRAFFIC→

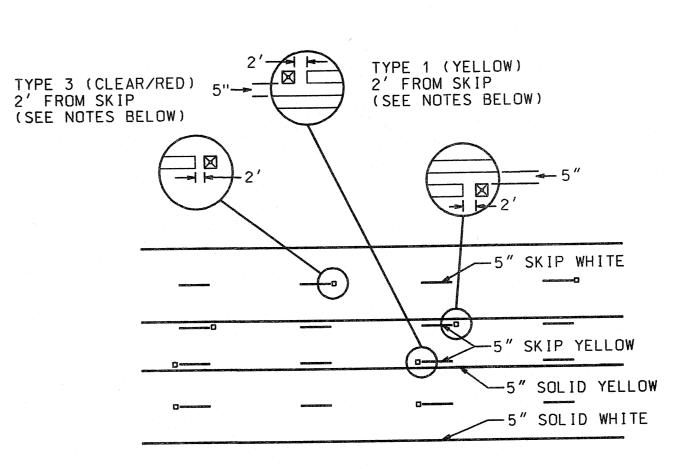

TWO WAY LEFT TURN LANE

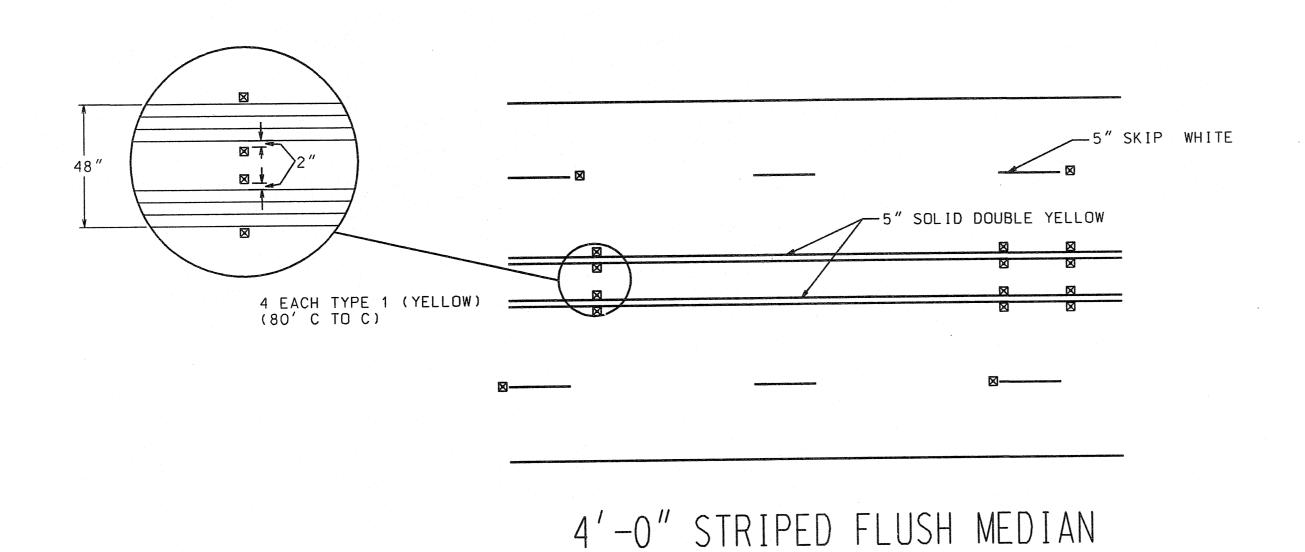

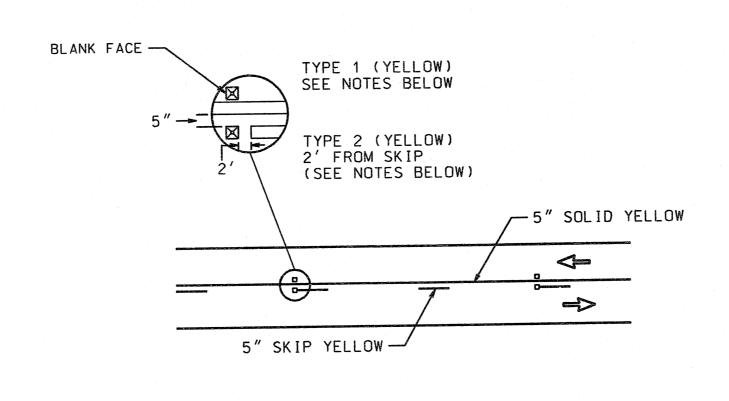

NO PASSING ZONE

GENERAL NOTES:

- RAISED PAVEMENT MARKERS SHALL BE SPACED EVERY 80 FT UNLESS OTHERWISE SPECIFIED.
- 2. ON SOLID WHITE TURN BAY LINES, SPACING SHALL BE 20 FT.
- 3. RAISED PAVEMENT MARKERS SHALL BE OFFSET 5 INCHES FROM SOLID LANE LINES.
- 4. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD ONCOMING TRAFFIC.
- 5. ON HORIZONTAL CURVES WHERE AT LEAST 3 MARKERS CANNOT BE SEEN AT ONE TIME USING NORMAL SPACING, MARKERS SHALL BE PLACED 40 FT.

| | DATE | REVISIONS | GEORGIA DEPARTMENT OF TRANSPORTATION | |
|---|---------|-----------------------|--------------------------------------|--|
| | 9-4-03 | NO PASSING ZONE RPM's | OFFICE OF TRAFFIC SAFETY & DESIG | |
| - | 1-13-04 | NO PASSING ZONE RPM's | | |
| | · | | DETAILS OF | |
| | | | RAISED PAVEMENT MARKER LOCATION | |
| | | | NON-LIMITED ACCESS ROADWAY | |
| | | | NO SCALE JANUARY 2000 | |